



# OUTLUX

## E027EI SIRIUS CCT LED FLOODLIGHT

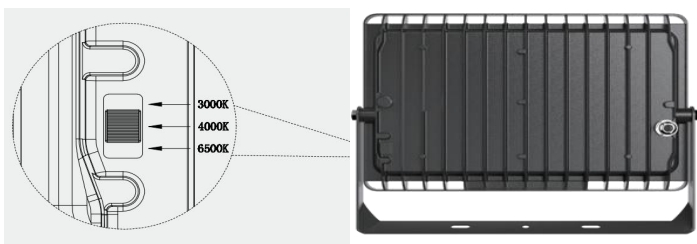

LED Chip Brand



### HIGH LIGHTS

High power bracket with gear design to make the light be installed firmly and the angle will not be offset after long time use.

Up to 120lm/w light output efficiency, and adjustable CCT switch is optional.

The highest IK06 protection grade, IP65 waterproof grade. RGBCW with TUYA intelligent control is available.

<b>Model No.</b>	E027EI	E027EI	E027EI
<b>Power Consumption(±10%)</b>	50W	100W	150W
<b>LEDs Type</b>	SMD2835	SMD2835	SMD2835
<b>LEDs Qty</b>	108 pcs	216 pcs	324 pcs
<b>Luminous Flux (±10%)</b>	5000lm	10000lm	15000lm
<b>Efficacy (±10%)</b>	120LM/W (3000K will be 8% lower)		
<b>Correlated Color</b>	CCT ( 3000K 4000K 6500K )		
<b>Color Rendering Index</b>	Ra70 (Ra80 optional)		
<b>Beam Angle</b>	120°		
<b>Power Supply</b>	OUTLUX Linear DOB		
<b>Driver Type</b>	Linear Constant Current		
<b>Input Voltage</b>	220-240 VAC		
<b>Range of Voltage ACCEPTABLE</b>	185-265 VAC		
<b>Power Factor</b>	≥0.95		
<b>Frequency</b>	50 / 60 Hz		
<b>Surge Protection</b>	3 KV		
<b>Product Dimension (mm)</b>	210×183×34	290×248×34	325×255×38
<b>Luminaire Net Weight</b>	0.55 Kg	1.25 Kg	1.5 Kg
<b>Pcs/Carton</b>	20 pcs	10 pcs	5 pcs
<b>Export Carton Size ( cm )</b>	44.2×27.5×34	53.5×31.3×24.2	34×29×264.8
<b>Gross Weight</b>	12.5 Kg	14 Kg	8.7 Kg
<b>Material</b>	<b>Housing</b>	Die casting aluminum	
	<b>Optics</b>	Toughened glass	
<b>Finish</b>	Powder Coating		
<b>Fixture Color</b>	Grey		
<b>IP Rating</b>	IP65		
<b>IK Rating</b>	IK06		
<b>Insulation class</b>	Class I		
<b>Operating Temperature</b>	-40°C to + 50°C		
<b>Life Time</b>	>36,000Hrs (Ta=30°C@L70)		
<b>Warranty</b>	2 Years		
<b>Power cord</b>	SAA certified Australian standard plug wire 3G1.0mm <sup>2</sup> *150cm		