Instruction Manual

Specifications and Technical Data sheet:

Luminaire Category: H015AEI GEM LED High bay

Input Voltage: AC185-265V 50/60Hz

Rated CCT: 6500K (3000/4000K optional)


Ambient -40°C <TA < 50°C

Temperature:

Surge Protection: 10KV SPD

IP Grade: IP65
IK Grade: IK06

Material: Aluminum alloy & Tempered glass

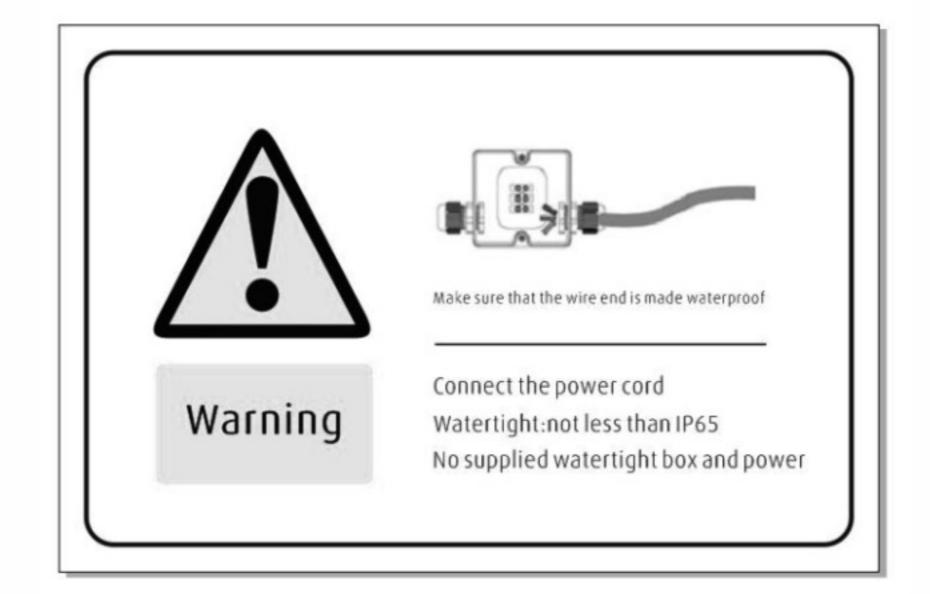

Product model	Powe	Power	Input curren t(A)	Luminous flux ±10%	Installatio n height(M)	Net weight (Kg)	Size: (mm) φ*Η
				(LM)			
H015AEI-50W	50W	≥0.95	0.25	5000LM	≤8M	0.6	210*80
H015AEI-100W	100W	≥0.95	0.5	10000LM	≤10M	0.85	250*80
H015AEI-150W	150W	≥0.95	0.75	15000LM	≤12M	1.25	300*80
H015AEI-200W	200W	≥0.95	1.00	20000LM	≤12M	1.7	350*85

WARNING:

- 1.Before installation, ensure that the power supply is turned off and read all instructions below, and users should prepare necessary accessories and spare parts (not provided).
- 2.If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- 3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- 4. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.3 m is not expected.
- 5.To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- 6. This product is not suitable for the following situations:
- 1). Working at temperatures close to or even exceeding the upper or lower limits for extended periods of time:
- 2).24 hours of continuous working;
- 3). The input voltage operates above or below the rated voltage range;

The above situation will reduce the lifespan of the lamp and cannot meet the warranty requirements.


7. When installing lamps on outdoor high poles or other outdoor high place, it is recommended to add SPD at the input end to increase the product's resistance to lightning surge impact.


All OUTLUX products are authorised to OUTWAY ONLY





MOUNTING:


- 1.Do not mount a surface prone to vibrations.
- 2.Install the hook on the roof.(Suggest the hook which is M10 and its load-bearing is more than 10Kg.)(see fig.2)
- 3.Pls put the highbay in the hook.(see fig.3)
- 4.Connect your mains cable(H05RN-F3G1.0mm2 Recommended) with the input lead of our product through the of junction box. Note the Line(-) of the lead. (see fig.4)
- 5. Open the power to make sure if the product can be lighten. (see fig. 5)
- 6.Pay attention do not install at wrong direction.(see fig.6)

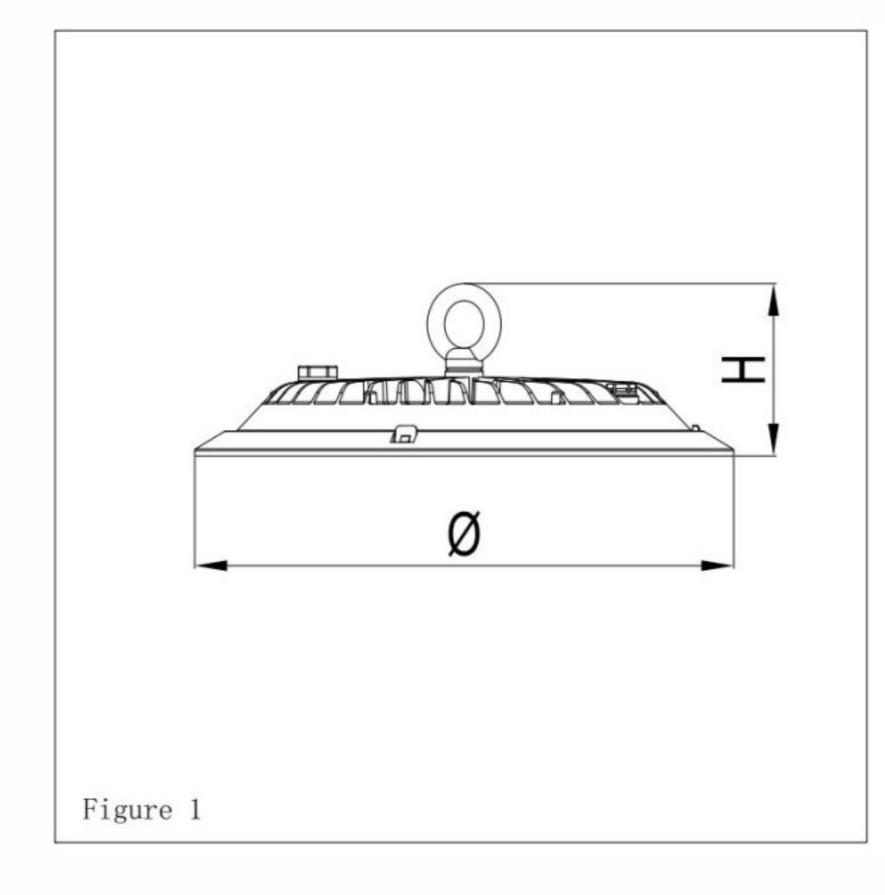


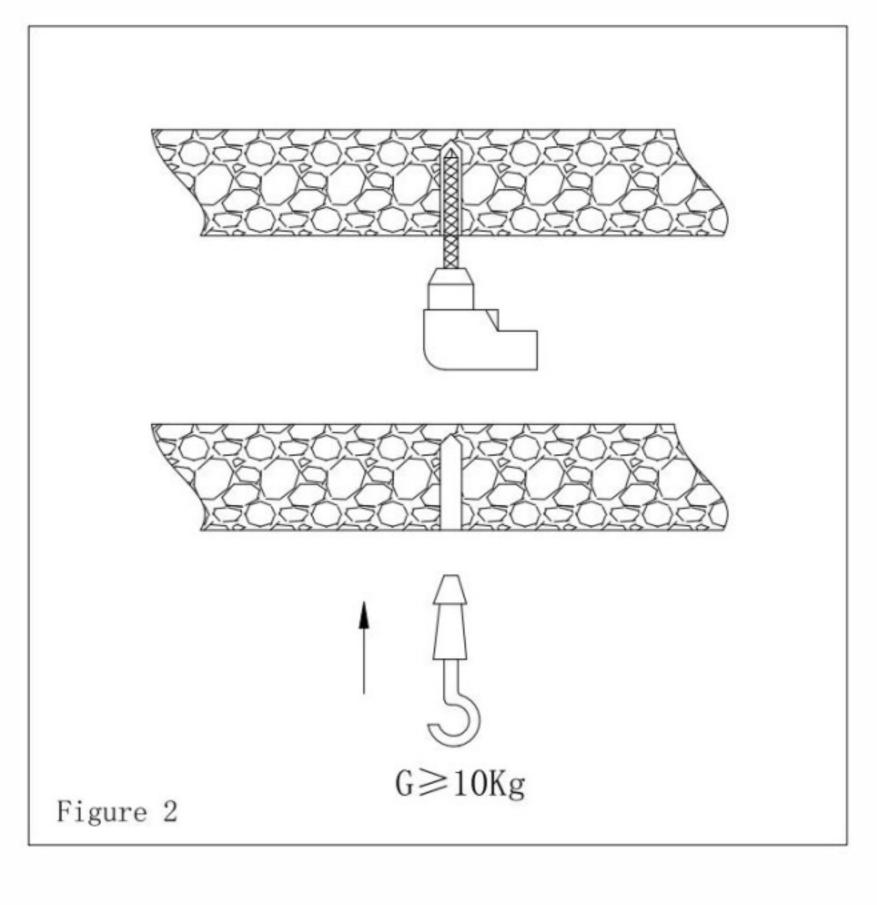


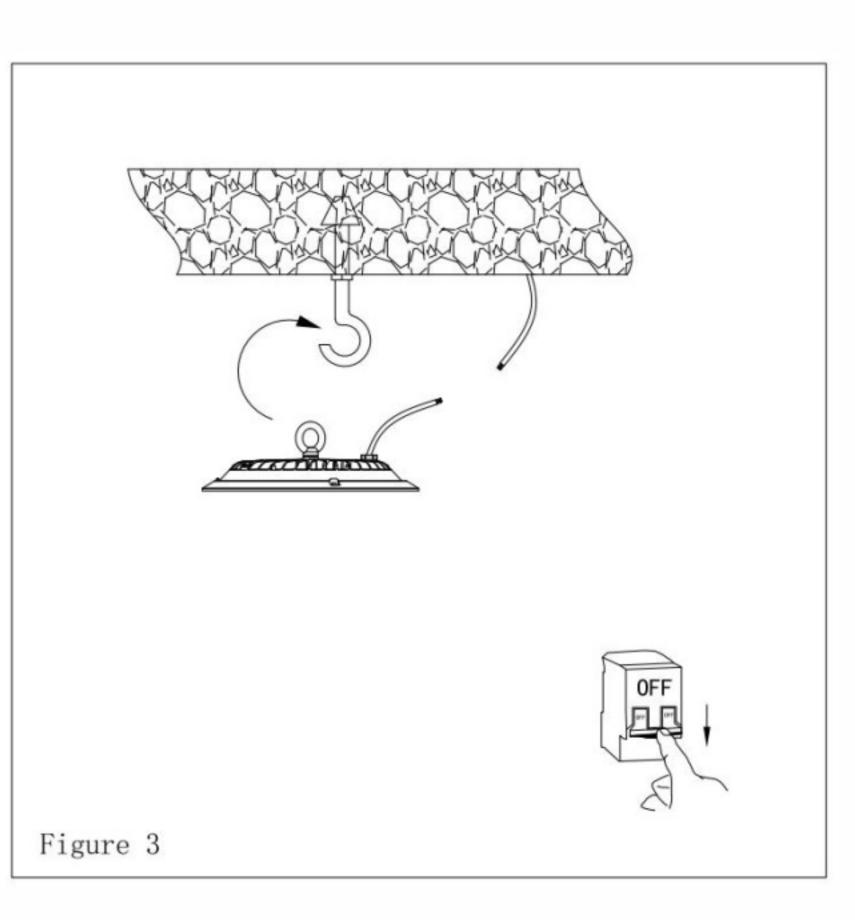

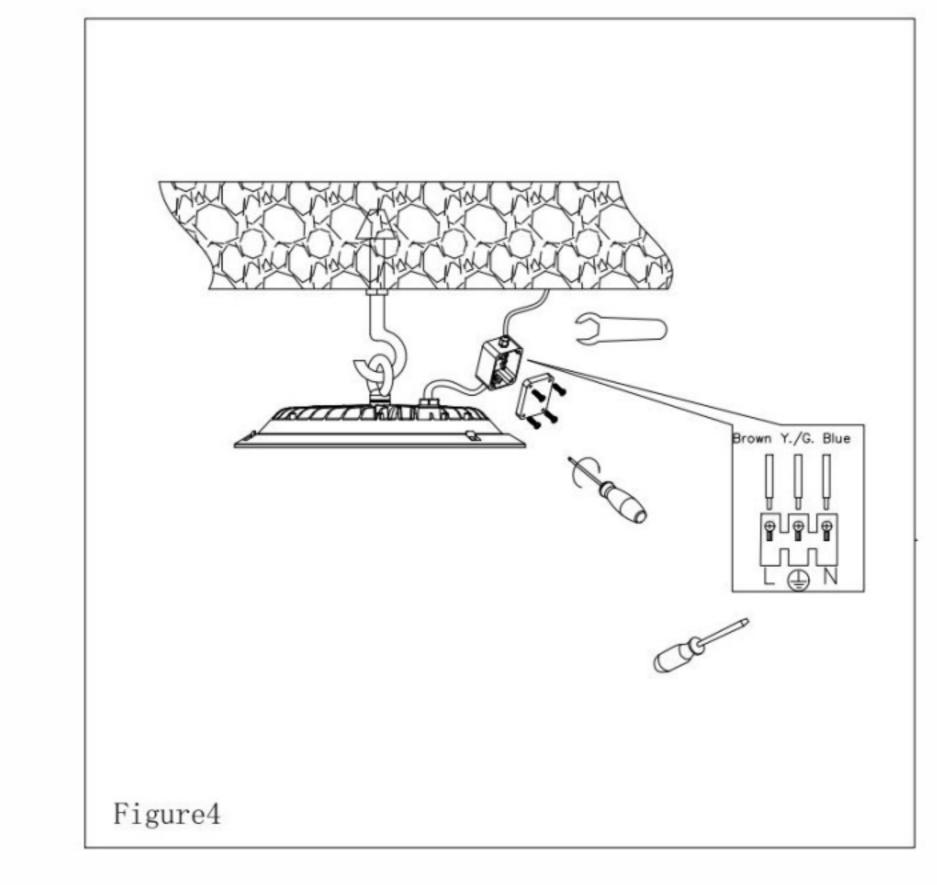

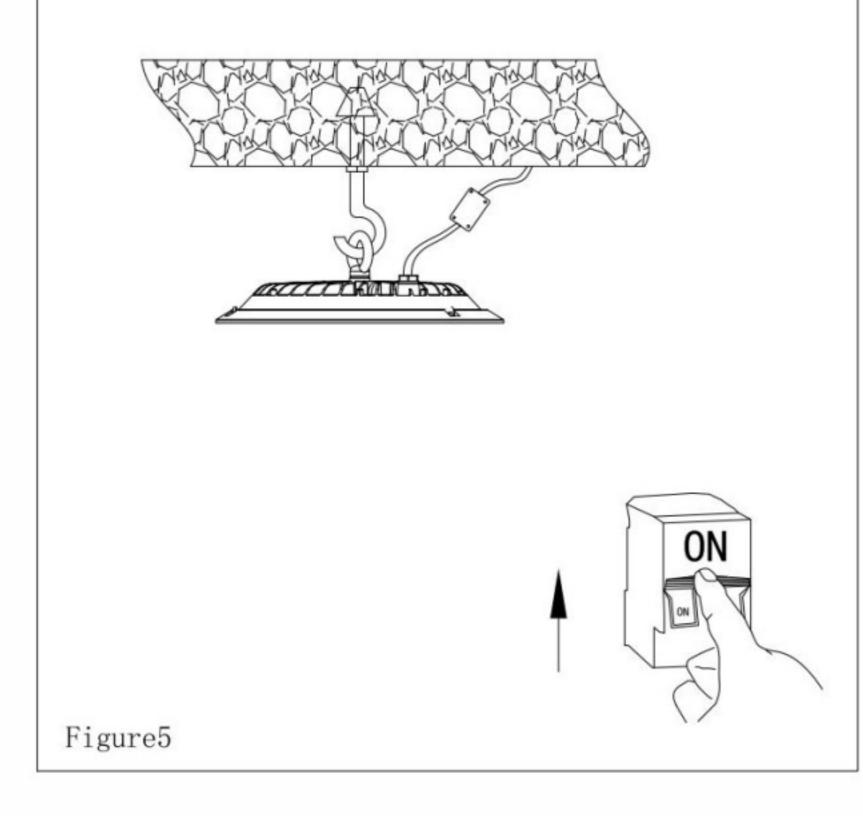

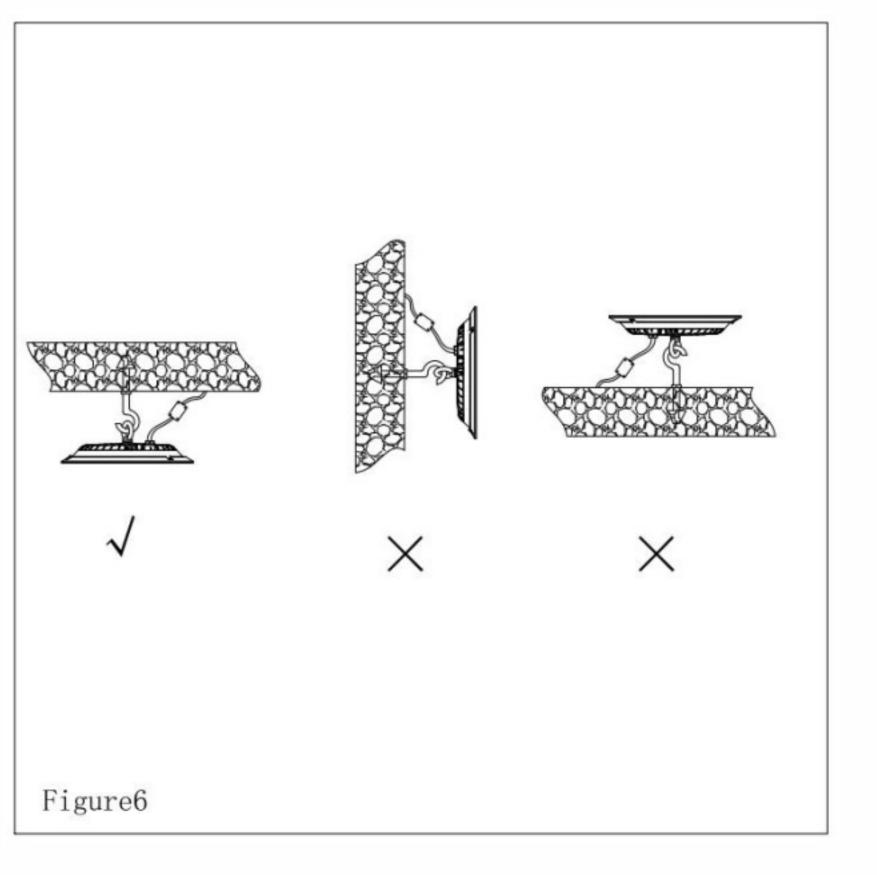

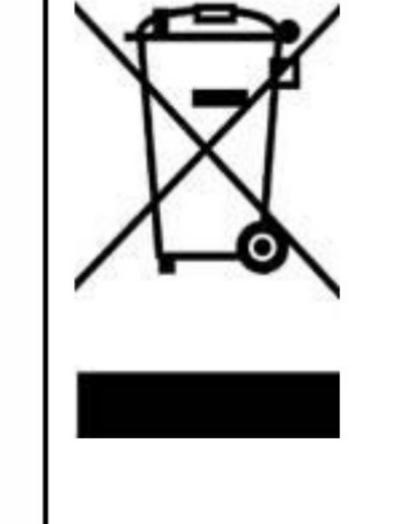

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Please don't open our products by yourself, it may causes water leakage.

The power of final interpretation belong to the manufacturer.

All OUTLUX products are authorised to OUTWAY ONLY