OUTWAY | H015EI

LED High bay

OUTWAY GROUP Lighting

OUTWAY

H015EI

LED High bay

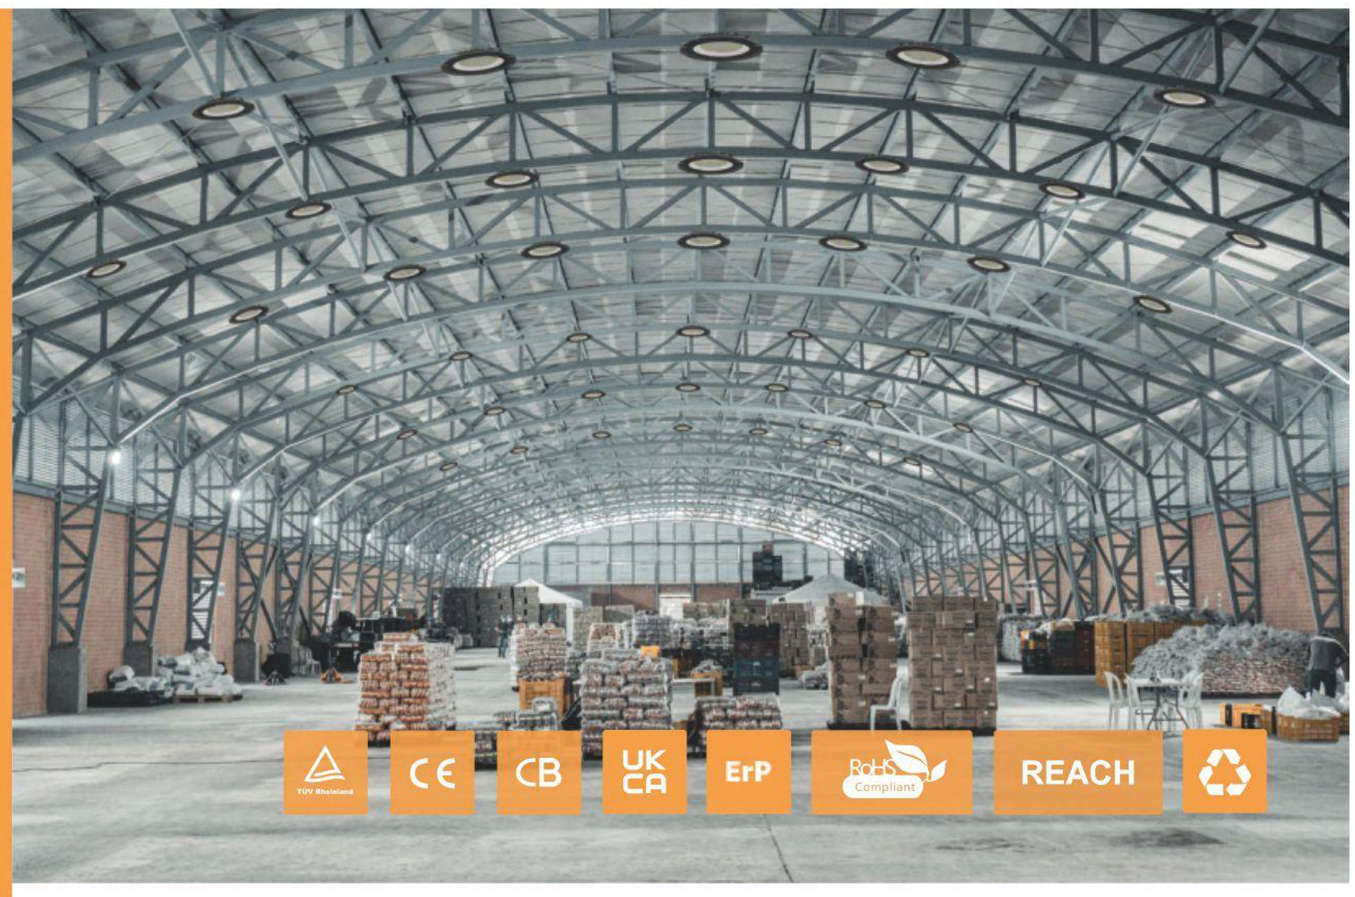

DIMENSIONAL LINE DRAWING

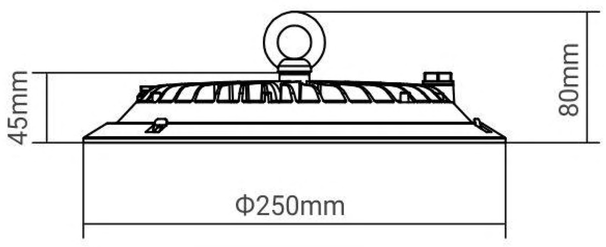

H015EI-100W

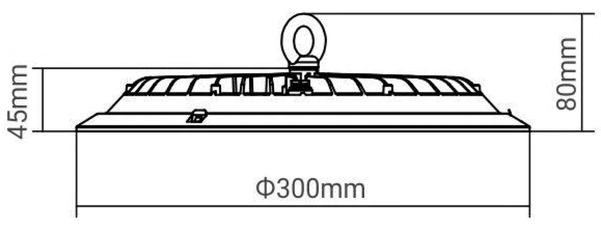

H015EI-150W

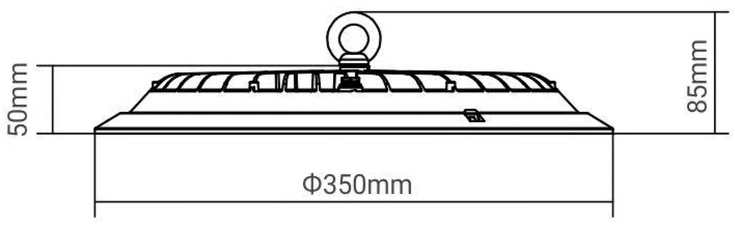

H015EI-200W

WATERPROOF

ANTI-IMPACT

PRODUCT LIFETIME

TWO-YEAR WARRANTY

3KV/10KV SURGE PROTECTION

CLASS I

WORKING TEMPERATURE

Input Voltage 220~240V

Frequency 50 / 60 Hz

CCT 6500K

CRI Ra70 /80

Efficacy (±10%) 100LM/W

Beam Angle 120°

PHOTOMETRIC DATA

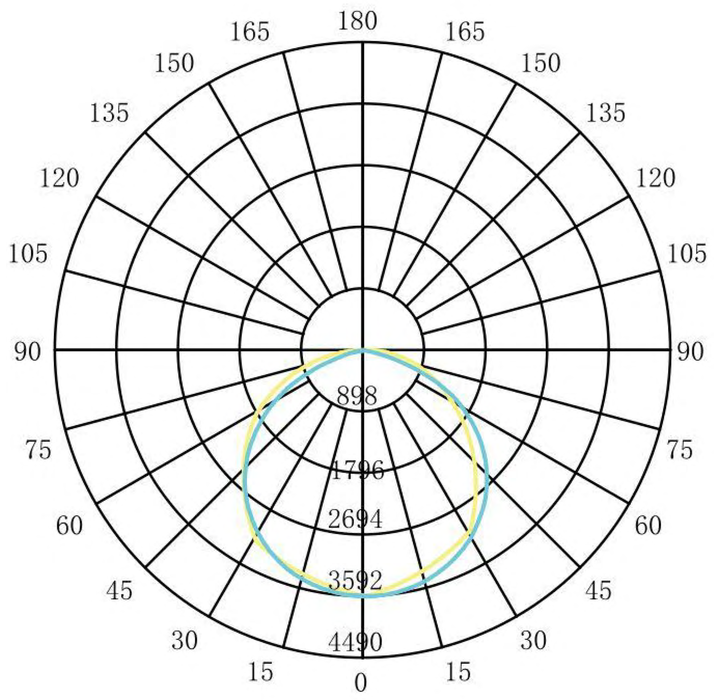

120°

HIGHLIGHTS

- Innovative convective design, faster heat conducting and better heat dissipation.
- 120°beam angle
- Two types hooks is optional.
- VDE rubber, strong weatherability.
- Tempered glass,light transmittance is 92%.

APPLICATIONS

Factory Workshop

Indoor Playground

Indoor Swimming Pool

Indoor Basketball Court

Super Market

Warehouse

Exhibition Hall

GENERAL INFORMATION

Power	H015EI-100W	H015EI-150W	H015EI-200W
LEDs Type &Qty	140pcs SMD2835	210pcs SMD2835	280pcs SMD2835
Luminous Flux (±10%)	9000lm	13500lm	18000lm
Luminous Flux (±10%)	10000lm	15000lm	20000lm
Luminous Flux (±10%)	12000lm	18000lm	24000lm
Product Dimension (mm)	Φ250×80	Φ300×80	Φ350×85
Efficacy (±10%)	100 LM/W		
Correlated Color	6500K		
Color Rendering Index	Ra70 (Ra80 optional)		
Power Supply	Linear DOB		
Input Voltage	220-240 VAC		
Range of Voltage ACCEPTABLE	185-265 VAC		
Power Factor	⩾0.95		

Frequency	50 / 60 Hz
Surge Protection	3KV(10KV SPD optional)
Flicker	<5%
Housing	Die casting aluminum
Optics	Toughened glass
Finish	Powder Coating
Fixture Color	Black/Gray
IP Rating	IP65
IK Rating	IK06
Insulation class	Class I
Mounting Option	Fixed installation
Operating Temperature	−40°C to + 50°C
Life Time	>36000Hrs
Warranty	2 Years
Power cord	1.5M AU PLUG

- For environmental protection reasons, the products are designed to be low-carbon. From January 1, 2021, our company will no longer provide plastic bags for packaging by default, making a contribution to global low-carbon and environmental protection.
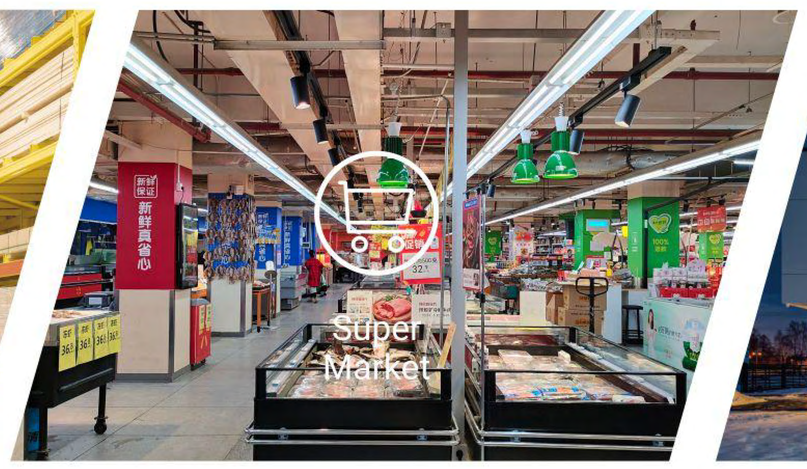
HIGHIGHTS