


# User Manual

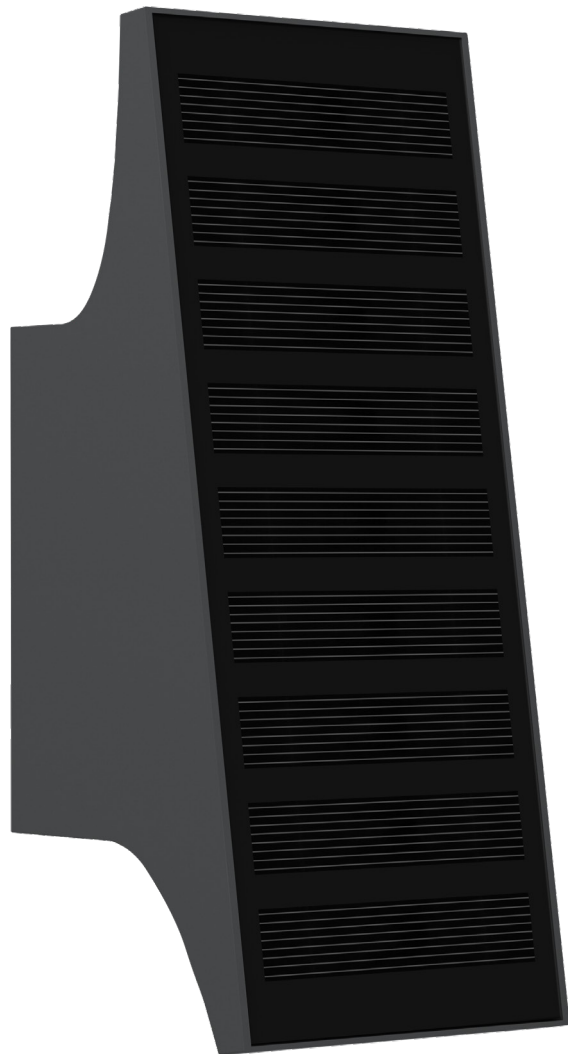

**Aquarius Solar Up & Down  
Wall Light PT0710**

# Product Introduction :

Solar Panel


Lamp Body

Switch Button

LED

Bracket (removable)


## What's Included :



PT0710




Screws




User Manual

# Product Installation :


- 1 Remove the bracket from the back of the light fixture.

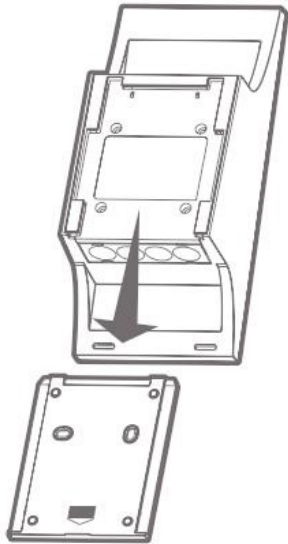


- 2 Use a drill to make the appropriate hole, then insert the expansion tube.

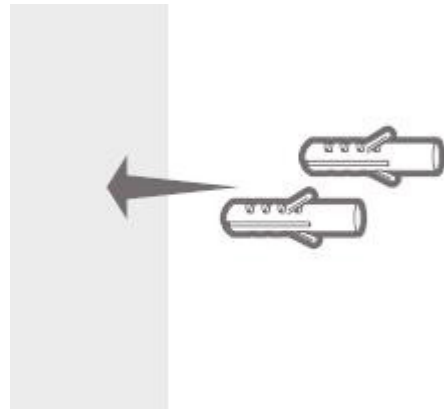

- 3 Fix the bracket by screws onto the wall.

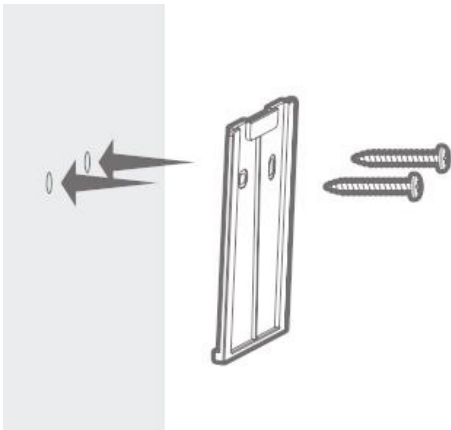

- 4 Hang the lamp body on the bracket.

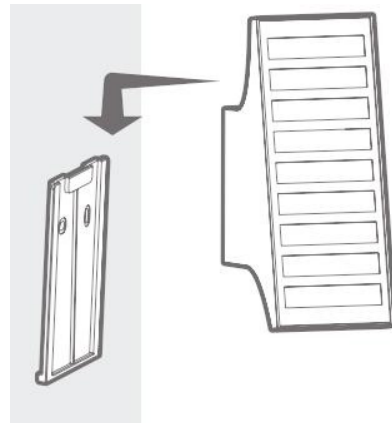


## Switch Button

1. ON/OFF: long press for 15s.  
(After the initial activation, the lamp will turn on/off automatically when dark/dawn.)
2. Change lighting mode: Short press.




# Lighting Mode :

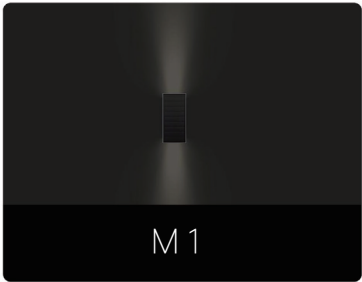

M 1

25% tilt down

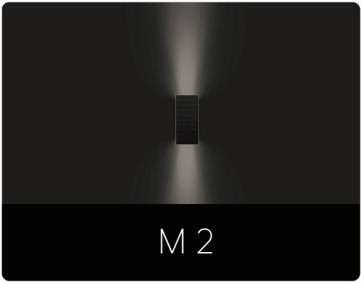


M 2

50% tilt down



M 3

75% tilt down

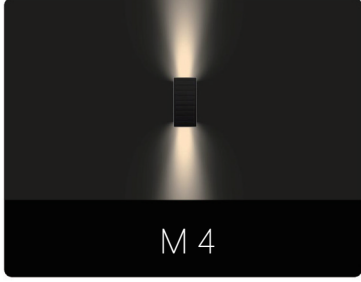

M 4

100% tilt down

# Specification :

Luminaire Category:	Aquarius Solar Up & Down Wall Light PT0710
Light Brightness:	700lm.Max (up 200lm, down 500lm)
Power:	Monocrystalline silicon, 4.86V/ 1.5W
Capacity:	3.7V 7.4WH
CCT:	4000K, Ra>70
Charging / Discharging Temp:	0~45°C / -20~60°C
Charging Time:	7H
LED:	2835, 8pcs
Efficiency:	160lm/W
Types of Lighting:	Symmetrical 23°
IP Grade:	IP65
Lighting Area.Max:	3m²
Install Height.Max:	2.5m
Material:	ABS + PC

# After-Sales Service :

**Warranty Period:** 2 years

**Void if:** Physical damage, unauthorized disassembly,  
or natural disasters



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Please don't open our products by yourself, it may causes water leakage.  
The power of final interpretation belong to the manufacturer.

## Special Note :

1. Do not install the lamp in places facing away from the sun, under the shadow, or between two buildings whose height is above the lamp. Otherwise, it will result in insufficient absorption from sunlight and insufficient working brightness and time.
2. Do not use the lamp in the environment temperature above 45°C or below 0°C, otherwise, it will cause the battery rapid attenuation and effect the battery lifetime, even damage.
3. Do not use non-standard accessories to install the lamp, otherwise, any caused accident will be borne by the installer.
4. Please charge the lamp not less than every 3 months to ensure the lithium battery activity.
5. 5. If the product has been stored in the warehouse for more than one year, please do fully charge and discharge inspection and make sure the battery is in good condition, Otherwise, it is forbidden to use.

## Warning :

1. Keep the device away from fire and oil to avoid any fire or explosion.
2. No one except professional technicians should attempt to disassemble the light to avoid damaging the light
3. It is strictly forbidden to disassemble the battery for personal use.
4. If the lamp doesn't get charged for 3 days, the battery maybe out of power, please charge it under bright sunlight.
5. To ensure the lamp works in an ideal state for a long lifetime, please clean the solar panel regularly according to the local dust condition, it's suggested one time at least every 6 months.
6. Long timet(over one year) static storage of the produc will cause the inside battery damage or even leakage.When the battery leak, it will cause the battery leak, it will cause the battery ignite if suddenly charged by sun.